

Raccordo - L, maschio conico - A33



Filettatura maschio

BSPT

R 1/8

Pressione di

utilizzo


0 a 15 bar

Materiale

Ottone e ottone nichelato

Descrizione

Riferimento	Filettatura maschio BSPT
A33 18	R 1/8
A33 14	R 1/4
A33 38	R 3/8
A33 12	R 1/2
A33 34	R 3/4
A33 01	R 1

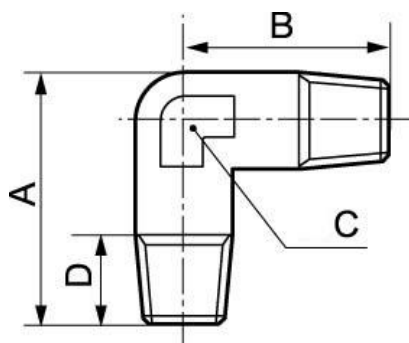

Dimensions				
Riferimento	A mm	B mm	C mm	D mm
A33 18	23.5	18.5	10	8
A33 14	30	23.5	13	11
A33 38	34.5	26	17	11.5
A33 12	41.5	31	21	14
A33 34	46.5	33	25	16
A33 01	55.5	39	30	17