

Portagomma filettato maschio cilindrico - JMJ



Filettatura maschio

BSPP

G 1/8

Per tubo flessibile Ø

int. (mm)

6

Tecnologia

Passaggio libero


Pressione di

utilizzo

0 a 15 bar

Descrizione

Riferimento	Filettatura maschio BSPP	Per tubo flessibile Ø int. (mm)
JMJ 1806	G 1/8	6
JMJ 1406	G 1/4	6
JMJ 1407	G 1/4	7
JMJ 1408	G 1/4	8
JMJ 3808	G 3/8	8
JMJ 1210	G 1/2	10
JMJ 1216	G 1/2	16

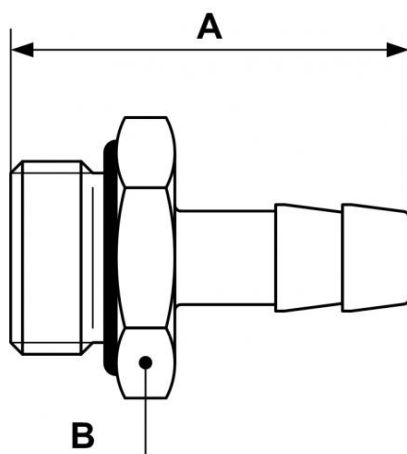

Dimensions

Riferimento	A mm	B mm
JMJ 1806	30	14
JMJ 1406	32	17
JMJ 1407	34.4	16
JMJ 1408	33	18
JMJ 3808	34	21
JMJ 1210	36	26
JMJ 1216	36	26