

## Portagomma filettato maschio cilindrico - JMJ



Filettatura maschio

**BSPP**

G 1/8

Per tubo flessibile Ø

**int. (mm)**

6

**Tecnologia**

Passaggio libero


Pressione di

**utilizzo**

0 a 15 bar

### Descrizione

Riferimento	Filettatura maschio BSPP	Per tubo flessibile Ø int. (mm)
<b>JMJ 1806</b>	G 1/8	6
<b>JMJ 1406</b>	G 1/4	6
<b>JMJ 1407</b>	G 1/4	7
<b>JMJ 1408</b>	G 1/4	8
<b>JMJ 3808</b>	G 3/8	8
<b>JMJ 1210</b>	G 1/2	10
<b>JMJ 1216</b>	G 1/2	16

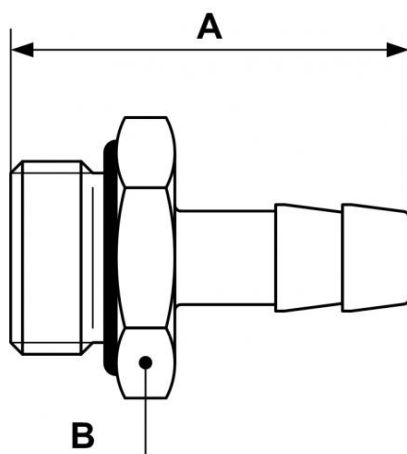

### Dimensions

Riferimento	A mm	B mm
<b>JMJ 1806</b>	30	14
<b>JMJ 1406</b>	32	17
<b>JMJ 1407</b>	34.4	16
<b>JMJ 1408</b>	33	18
<b>JMJ 3808</b>	34	21
<b>JMJ 1210</b>	36	26
<b>JMJ 1216</b>	36	26