

Valvola - Maschio cilindrico/Maschio cilindrico - RPS DG



Filettatura maschio

BSPP

G 1/8

Pressione di

utilizzo

0 a 10 bar

Temperatura


0°C a + 60°C

Materiale

Polimero e ottone nichelato

Descrizione

Riferimento	Filettatura maschio BSPP
RPS DG0000	G 1/8
RPS DG0100	G 1/8
RPS DG0101	G 1/4
RPS DG0201	G 1/4
RPS DG0202	G 3/8
RPS DG0302	G 3/8
RPS DG0303	G 1/2

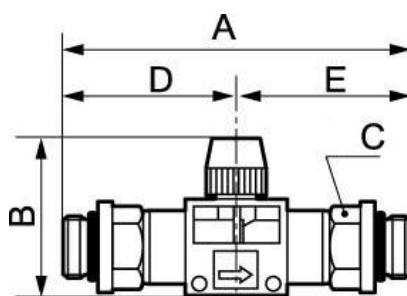

Dimensions

Riferimento	A mm	B mm	C mm	D mm	E mm
RPS DG0000	65	40.3	14	32.5	32.5
RPS DG0100	66.5	40.3	14	34	32.5
RPS DG0101	68	40.3	14	34	34
RPS DG0201	81.5	44.5	17	42	39.5
RPS DG0202	84	44.5	17	42	42
RPS DG0302	86	44.5	21	44	42
RPS DG0303	88	44.5	21	44	44