

Raccordo dritto maschio conico - RMD MR



Filettatura maschio

BSPT

R 1/8

Per tubo Ø est. (mm)

4

Pressione di

utilizzo

0 a 15 bar

Temperatura

-20°C a +80°C


Materiale

Ottone nichelato

Descrizione

Riferimento	Filettatura maschio BSPT	Per tubo Ø est. (mm)
RMD MR0400	R 1/8	4
RMD MR0600	R 1/8	6
RMD MR0601	R 1/4	6
RMD MR0800	R 1/8	8
RMD MR0801	R 1/4	8
RMD MR0802	R 3/8	8

Riferimento	Filettatura maschio BSPT	Per tubo Ø est. (mm)
RMD MR1001	R 1/4	10
RMD MR1002	R 3/8	10
RMD MR1202	R 3/8	12
RMD MR1203	R 1/2	12

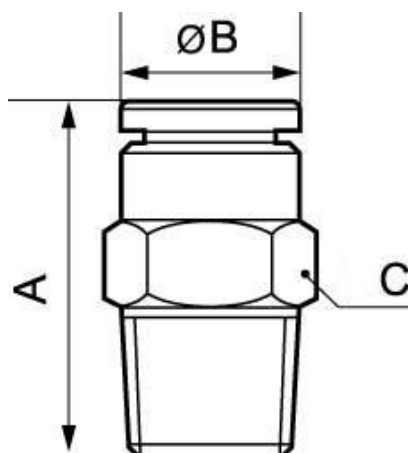

Dimensions			
Riferimento	A mm	B mm	C mm
RMD MR0400	20.5	9.8	10
RMD MR0600	24.5	11.6	12
RMD MR0601	26	11.6	14
RMD MR0800	28	13.5	14
RMD MR0801	27.5	13.5	14
RMD MR0802	27	13.5	17
RMD MR1001	34.5	15.5	17
RMD MR1002	30.3	15.5	17
RMD MR1202	31.5	17.8	19
RMD MR1203	34	17.8	22