

Raccordo dritto femmina cilindrico - RMD FG



Filettatura femmina

BSPP

G 1/8

Per tubo Ø est. (mm)

4

Pressione di

utilizzo

0 a 15 bar

Temperatura


-20°C a +80°C

Materiale

Ottone nichelato

Descrizione

Riferimento	Filettatura femmina BSPP	Per tubo Ø est. (mm)
RMD FG0400	G 1/8	4
RMD FG0600	G 1/8	6
RMD FG0601	G 1/4	6
RMD FG0800	G 1/8	8
RMD FG0801	G 1/4	8
RMD FG1001	G 1/4	10

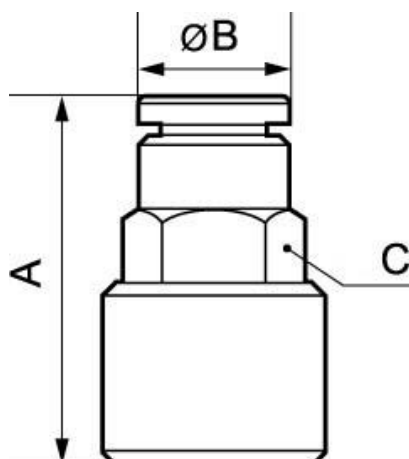

Dimensions			
Riferimento	A mm	B mm	C mm
RMD FG0400	27	9.8	10
RMD FG0600	30	11.6	13
RMD FG0601	32.5	11.6	13
RMD FG0800	30.5	13.5	14
RMD FG0801	32.5	13.5	14
RMD FG1001	35.5	15.6	17