

T laterale maschio, girevole conico - RMT AR



Filettatura maschio

BSPT

R 1/8

Per tubo Ø est. (mm)

4

Pressione di utilizzo

0 a 15 bar

Temperatura

-20°C a +80°C


Materiale

Ottone nichelato

Descrizione

Riferimento	Filettatura maschio BSPT	Per tubo Ø est. (mm)
RMT AR0400	R 1/8	4
RMT AR0600	R 1/8	6
RMT AR0601	R 1/4	6
RMT AR0800	R 1/8	8
RMT AR0801	R 1/4	8
RMT AR1001	R 1/4	10

Riferimento	Filettatura maschio BSPT	Per tubo Ø est. (mm)
RMT AR1002	R 3/8	10
RMT AR1202	R 3/8	12
RMT AR1203	R 1/2	12

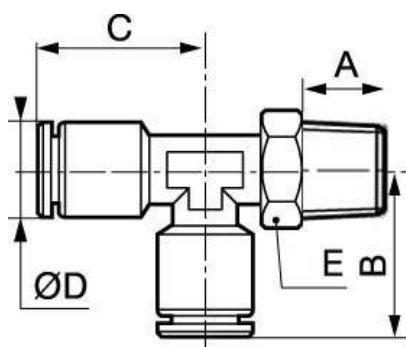

Dimensions

Riferimento	A mm	B mm	C mm	D mm	E mm
RMT AR0400	8	23	22	10	12
RMT AR0600	8	24	24	11.6	12
RMT AR0601	11	25	26	11.6	16
RMT AR0800	8	27.5	27.5	14.5	12
RMT AR0801	11	30	26	14	16
RMT AR1001	11	30.5	30.5	15.6	16
RMT AR1002	11	30.5	30.5	15.6	19
RMT AR1202	12	35	32	19	19
RMT AR1203	14	34.5	34.5	19	22